This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images, please do not report the images to the Image Problem Mailbox.

313-506

Fig.1.

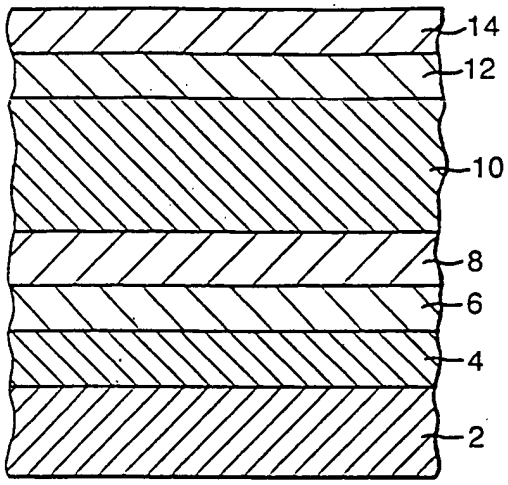

Fig.2.

(a)



(b)



(c)



(d)

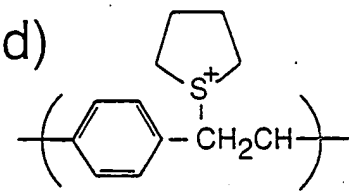

(e)

(f)

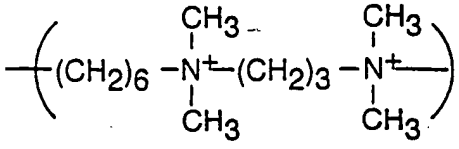

0950803A1 060600

Fig.3.

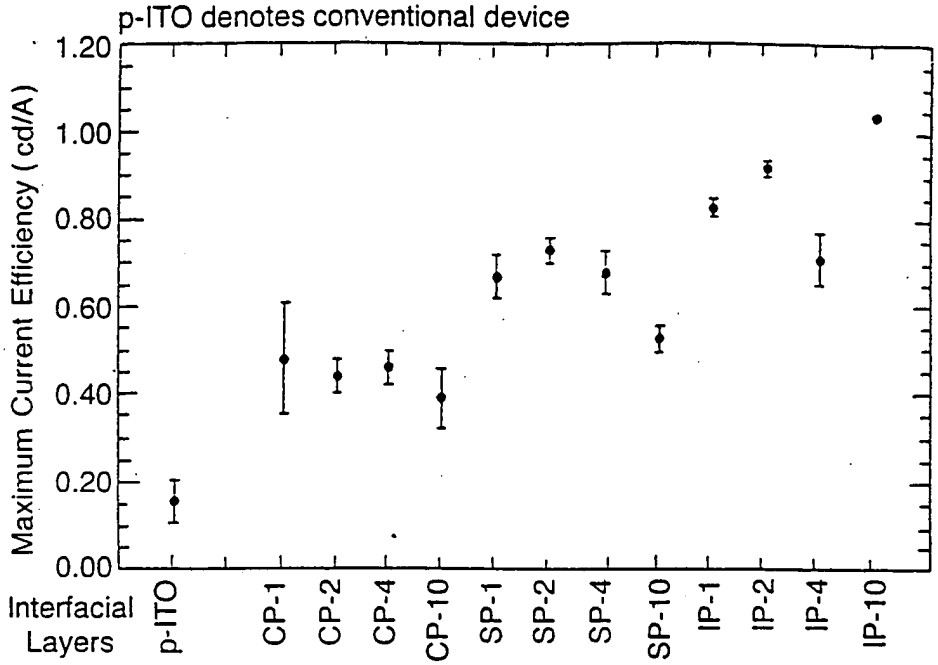
p-ITO denotes conventional device
Maximum Current Efficiency (cd/A)
1.20
1.00
0.80
0.60
0.40
0.20
0.00
Interfacial Layers
p-ITO
CP-1
CP-2
CP-4
CP-10
SP-1
SP-2
SP-4
SP-10
IP-1
IP-2
IP-4
IP-10

Fig.4.

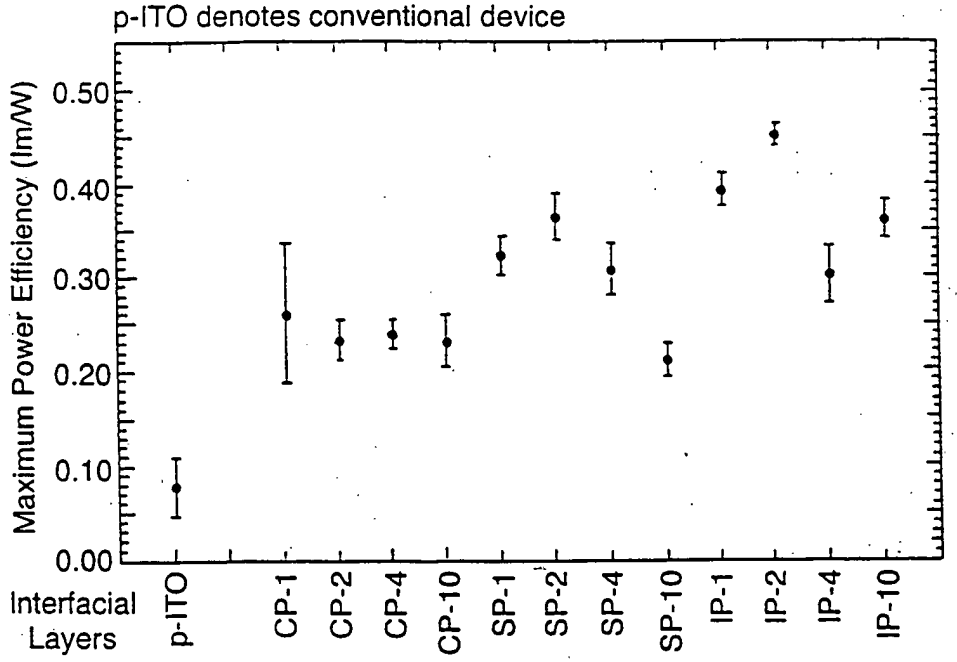
p-ITO denotes conventional device
Maximum Power Efficiency (lm/W)
0.50
0.40
0.30
0.20
0.10
0.00
Interfacial Layers
p-ITO
CP-1
CP-2
CP-4
CP-10
SP-1
SP-2
SP-4
SP-10
IP-1
IP-2
IP-4
IP-10

Fig.5.

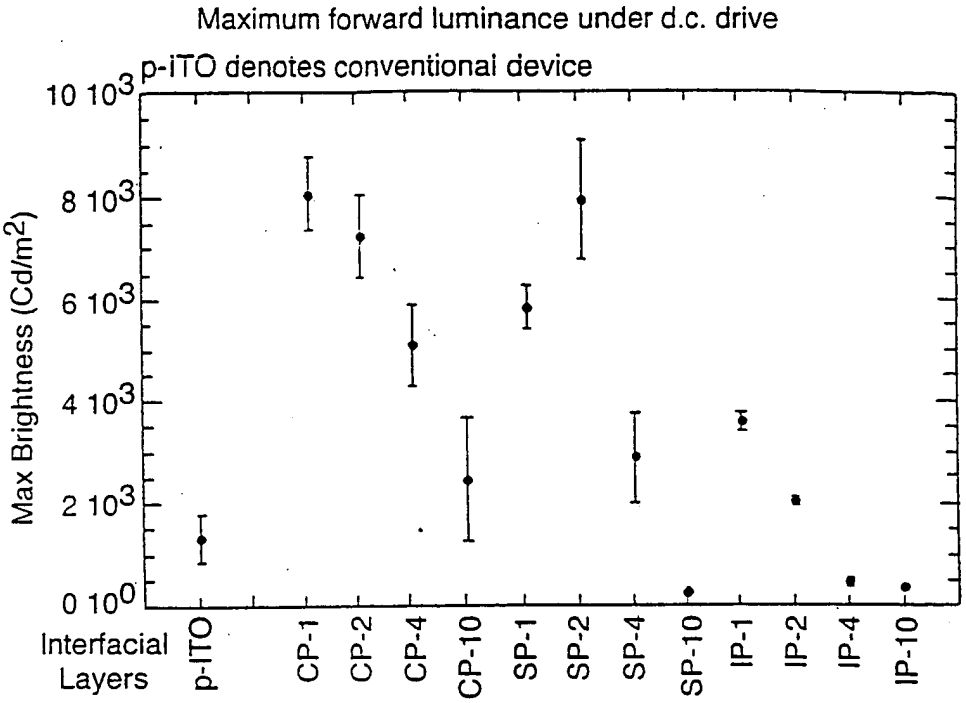

Fig.6.

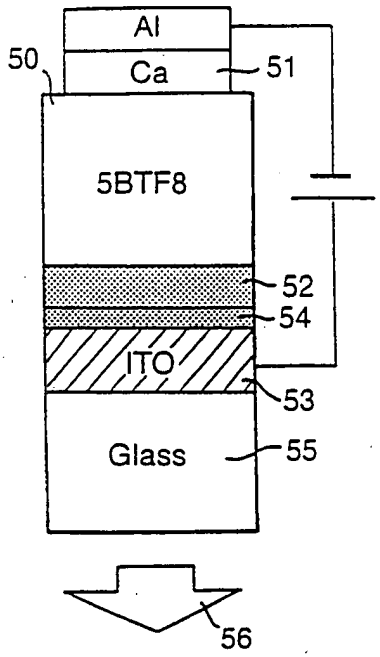

Fig.8.

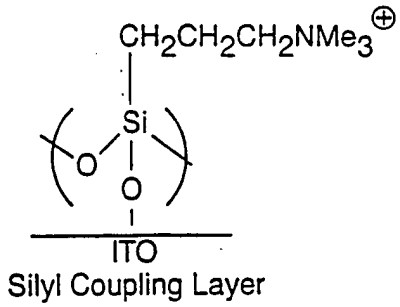

Fig.7.

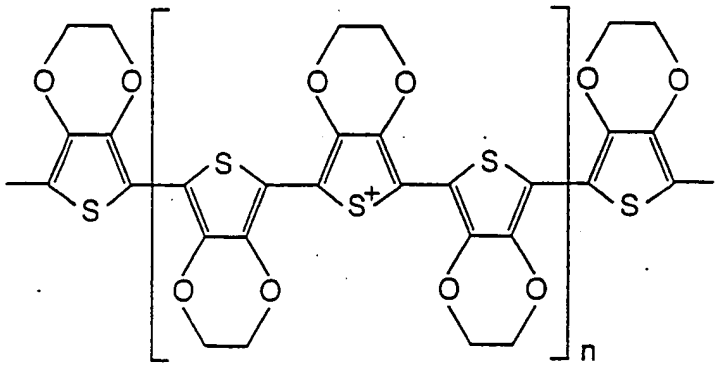

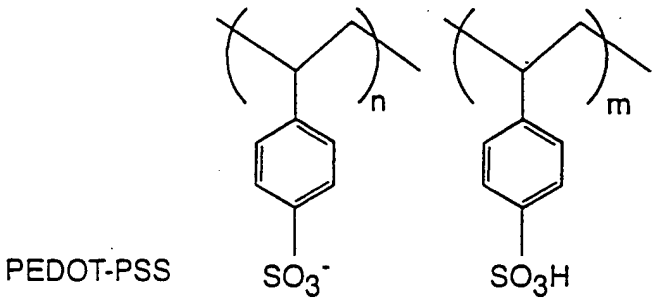

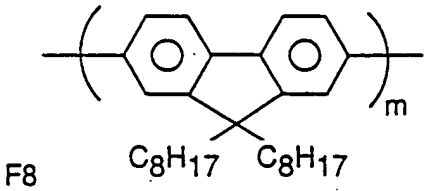

F8

Fig.7(Cont.)

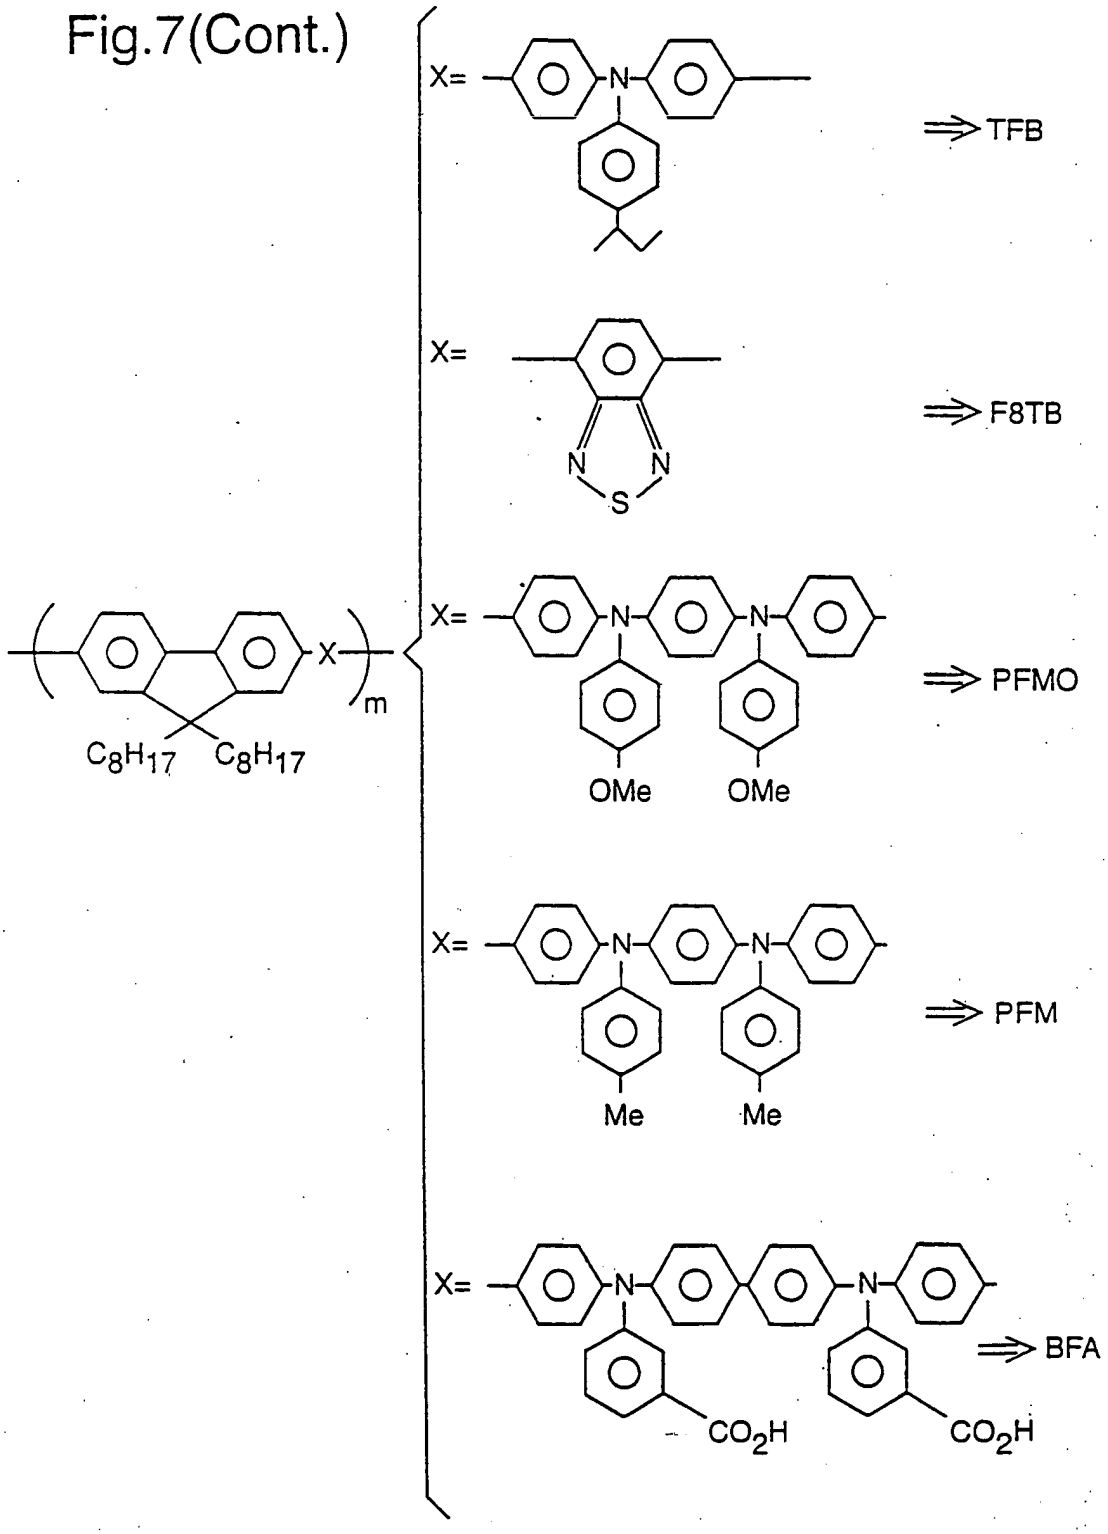
X=
⇒TFB
X=
⇒F8TB
X=
⇒PFMO
OMe
OMe
X=
⇒PFM
Me
Me
X=
⇒BFA
CO2H
CO2H
C8H17
C8H17
m

Fig.9.

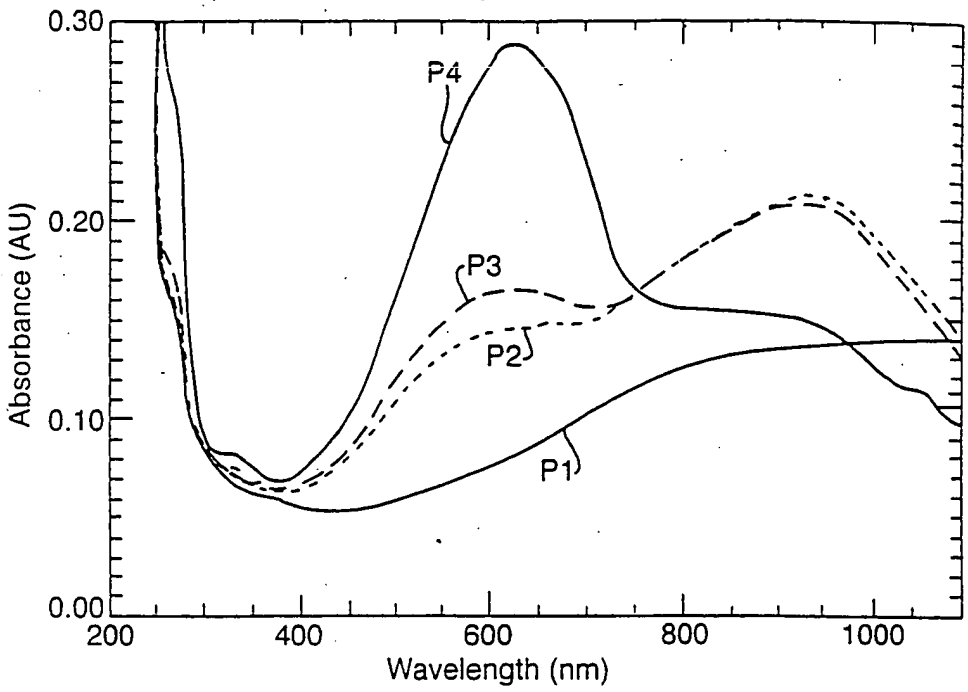

Fig.15.

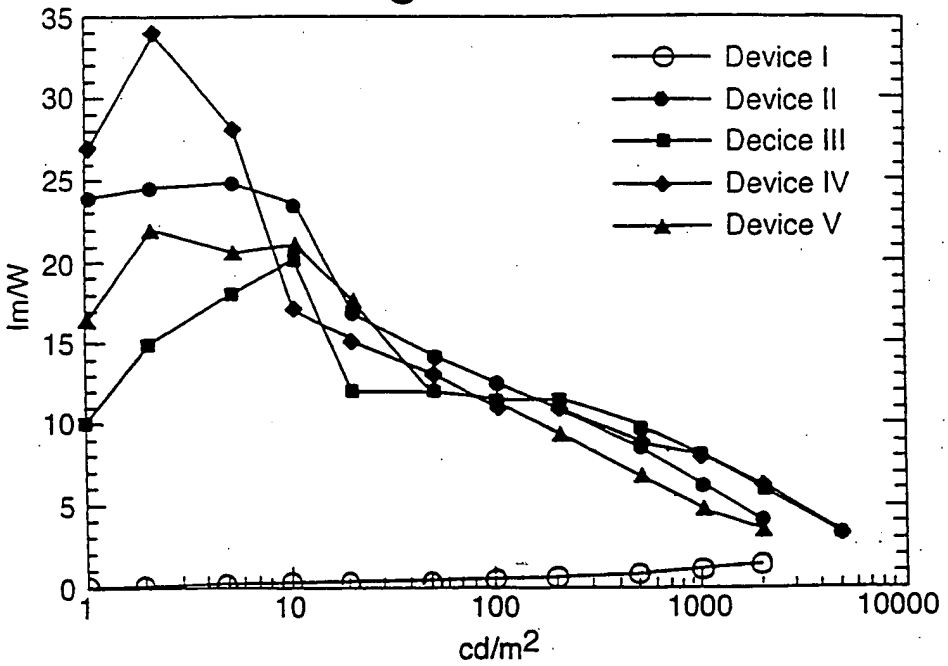

09508034 - 060600

Fig.10.

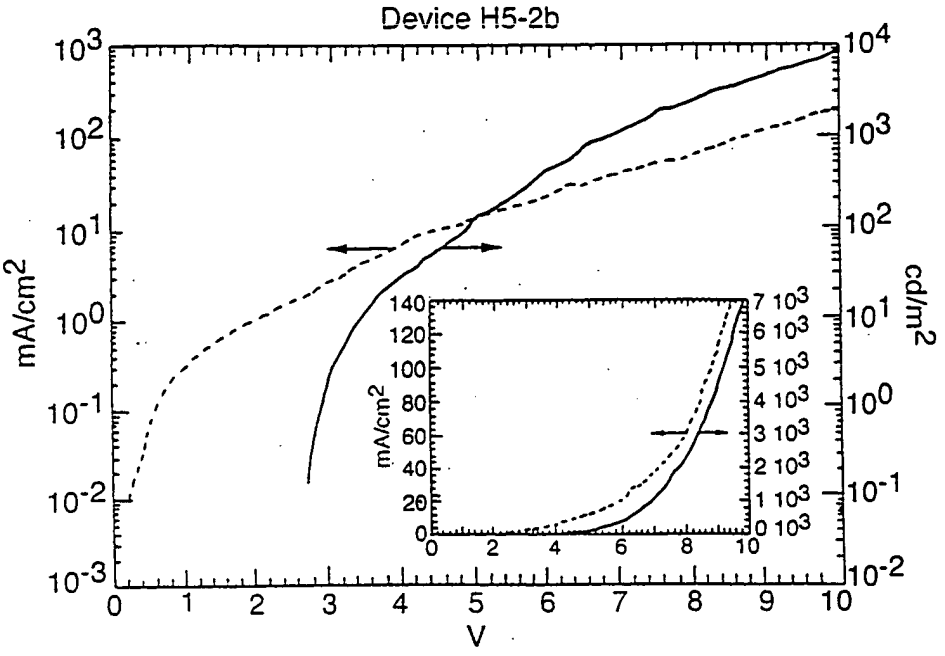

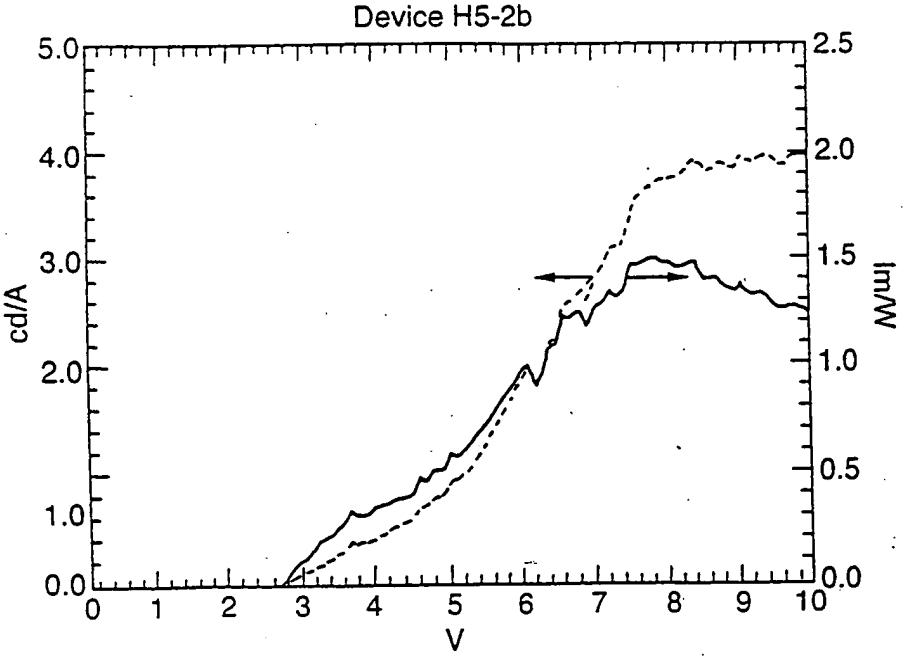

Fig.11.

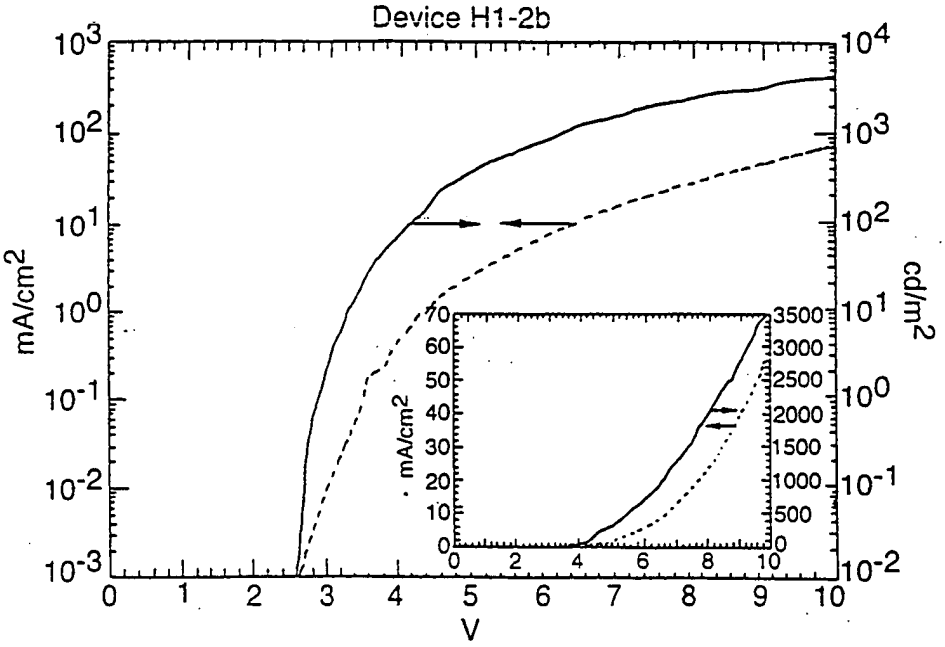

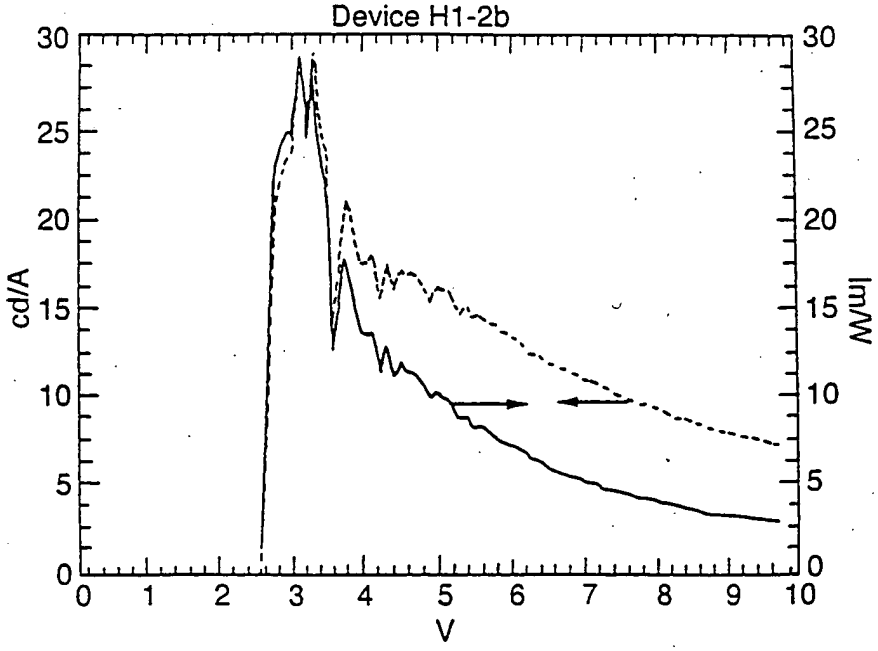

Fig.12.

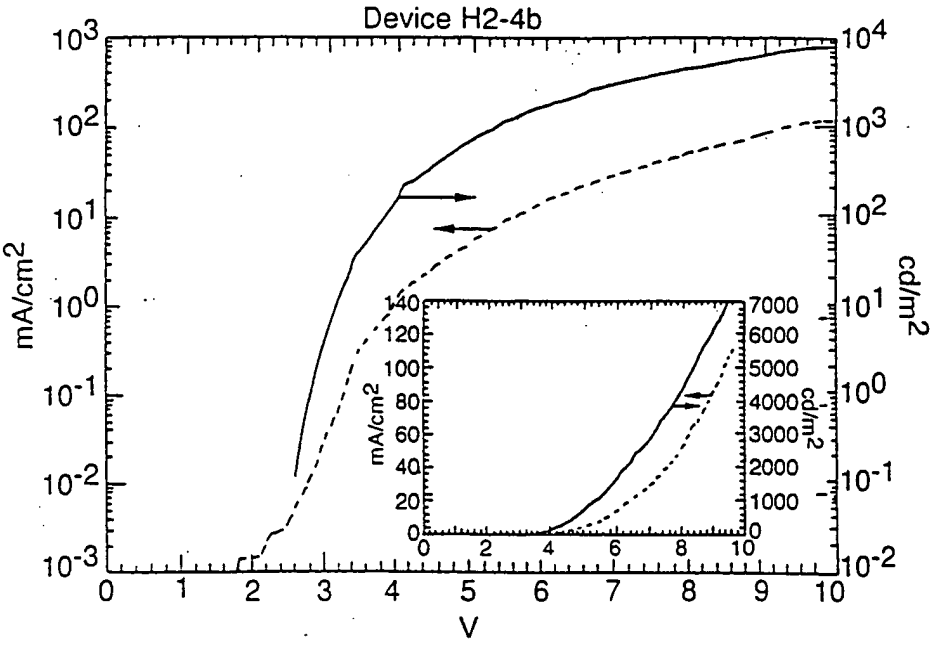
Device H2-4b
mA/cm2
cd/m2
V
10^3
10^2
10^1
10^0
10^-1
10^-2
10^-3
10^4
0 1 2 3 4 5 6 7 8 9 10
140 120 100 80 60 40 20 0
7000 6000 5000 4000 3000 2000 1000 0
0 2 4 6 8 10

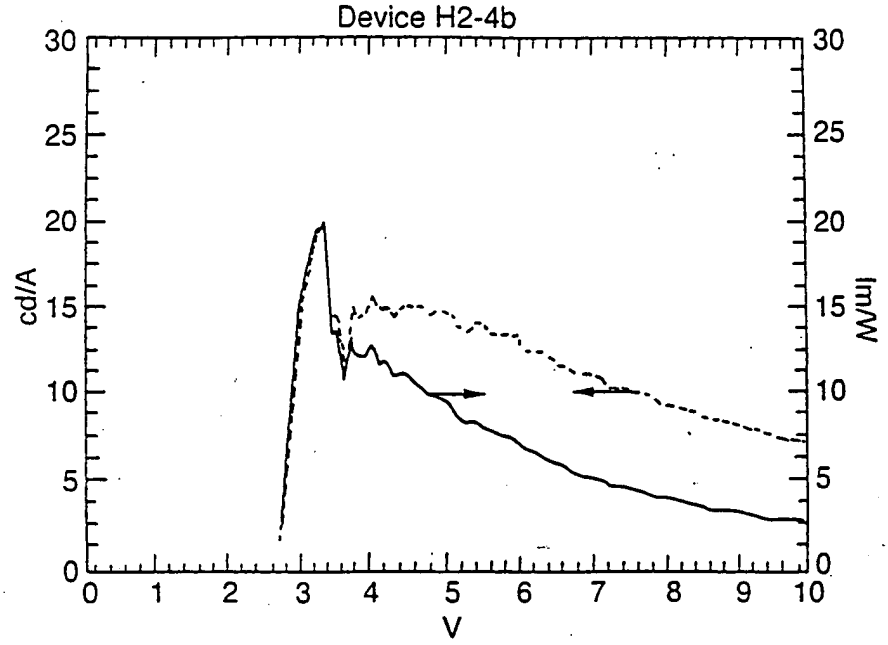
Device H2-4b
cd/A
lm/W
V
30 25 20 15 10 5 0
0 1 2 3 4 5 6 7 8 9 10

Fig.13.

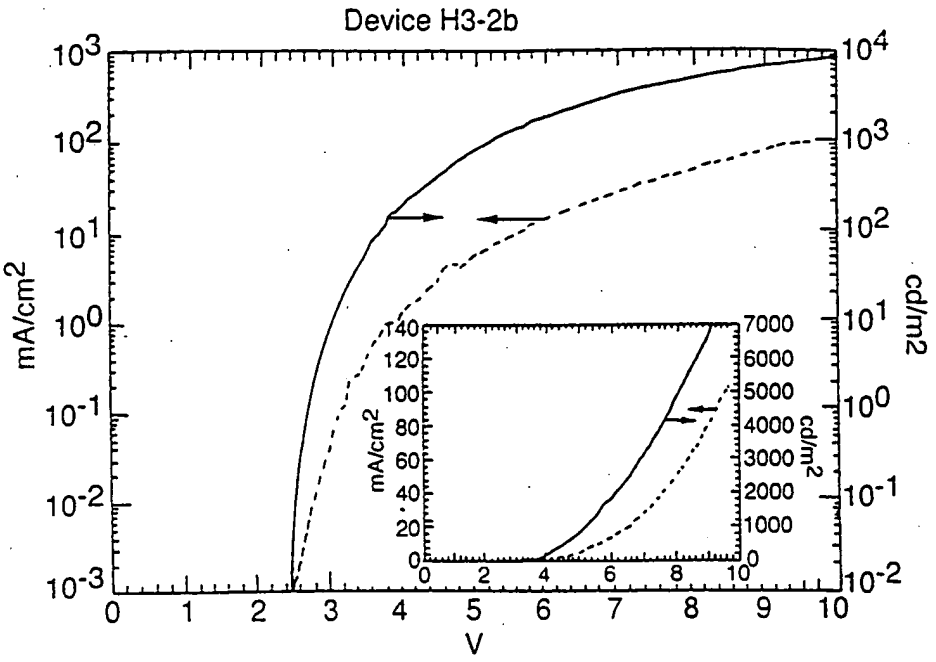

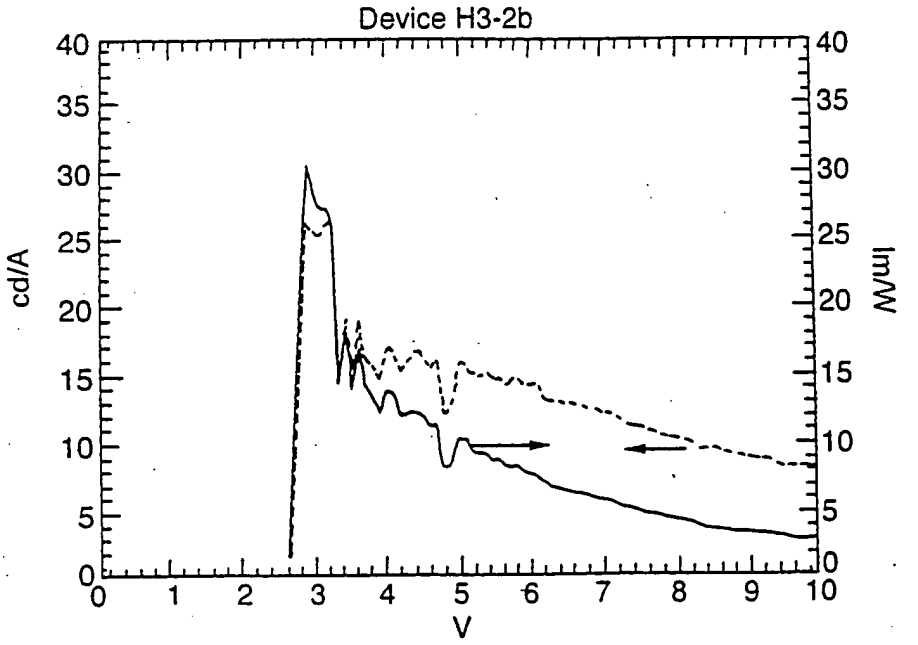

05080404-050505D

Fig.14.

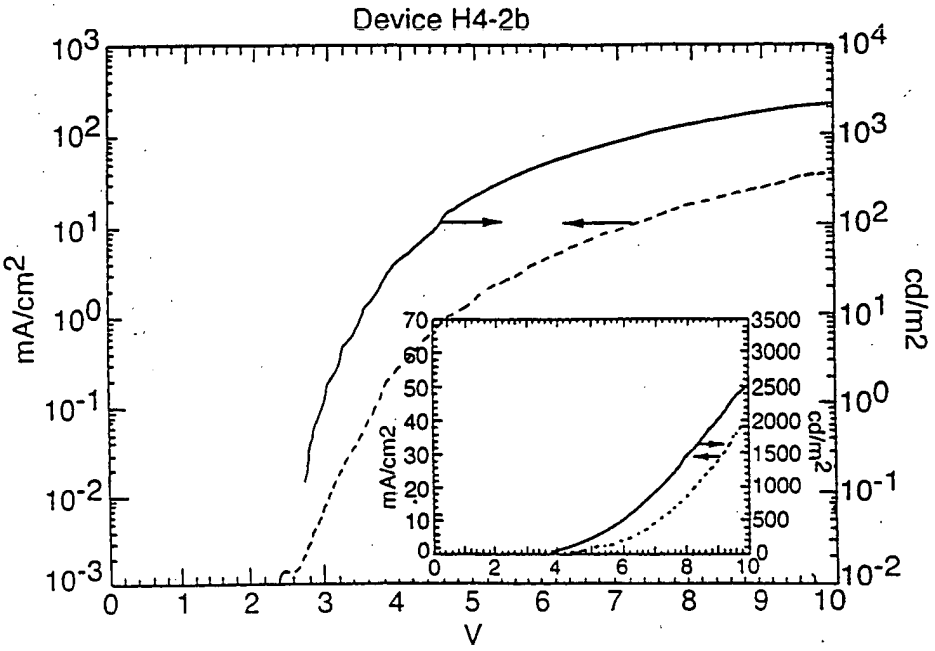

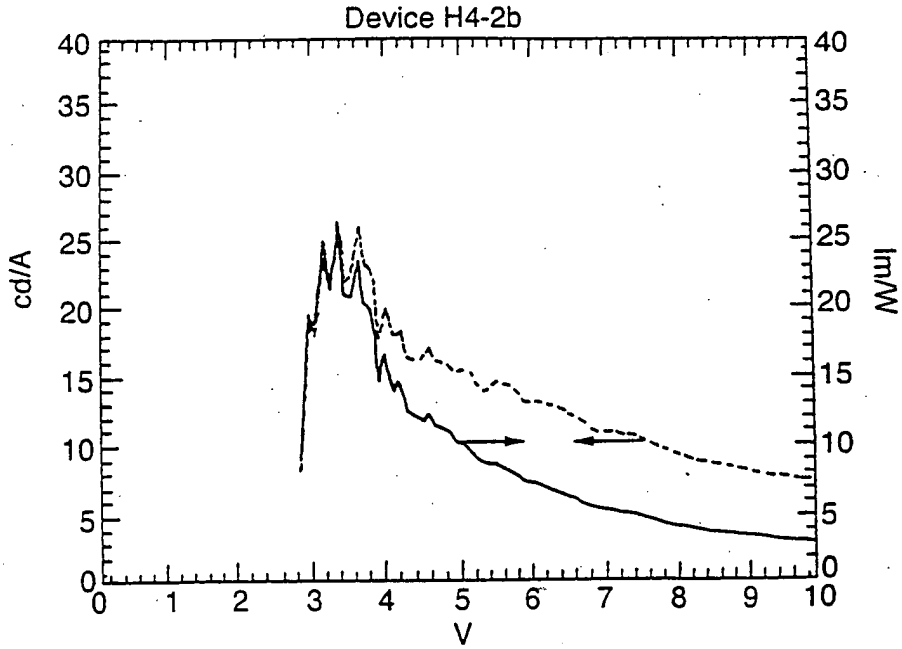

Fig.16a.

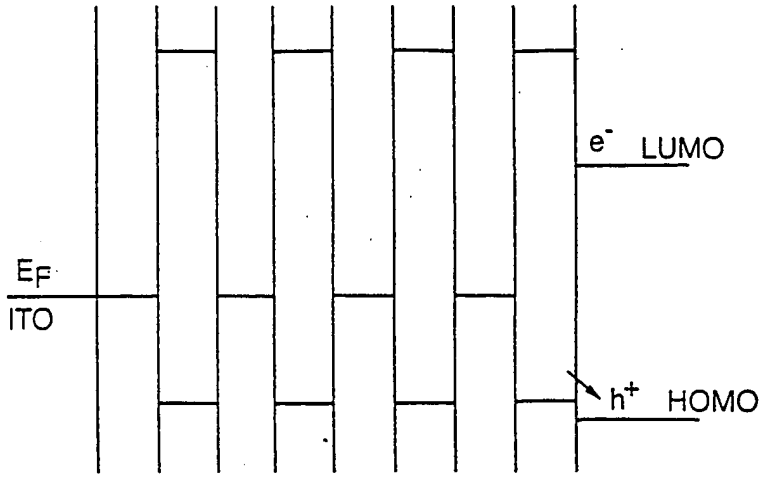

Fig.16b.

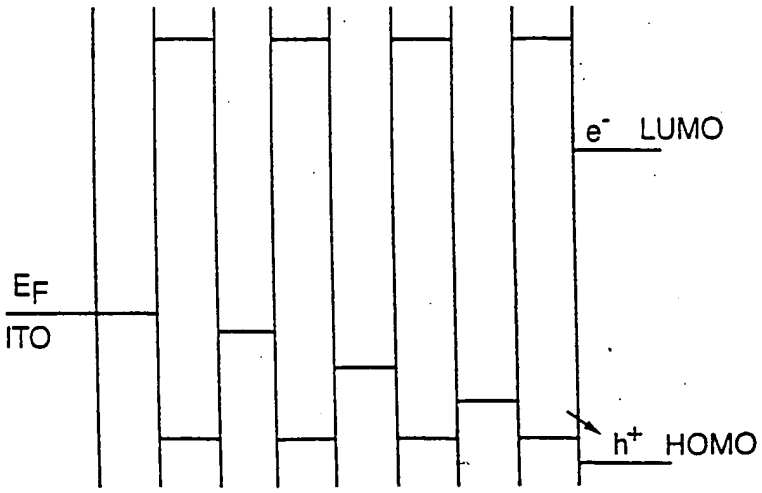

Fig.17.

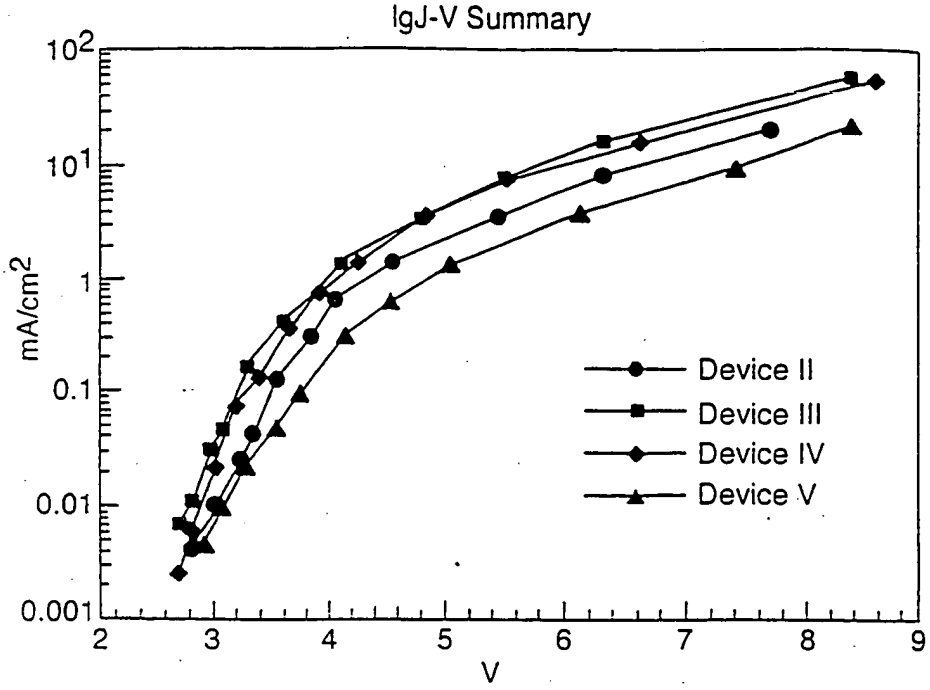

Fig.18.

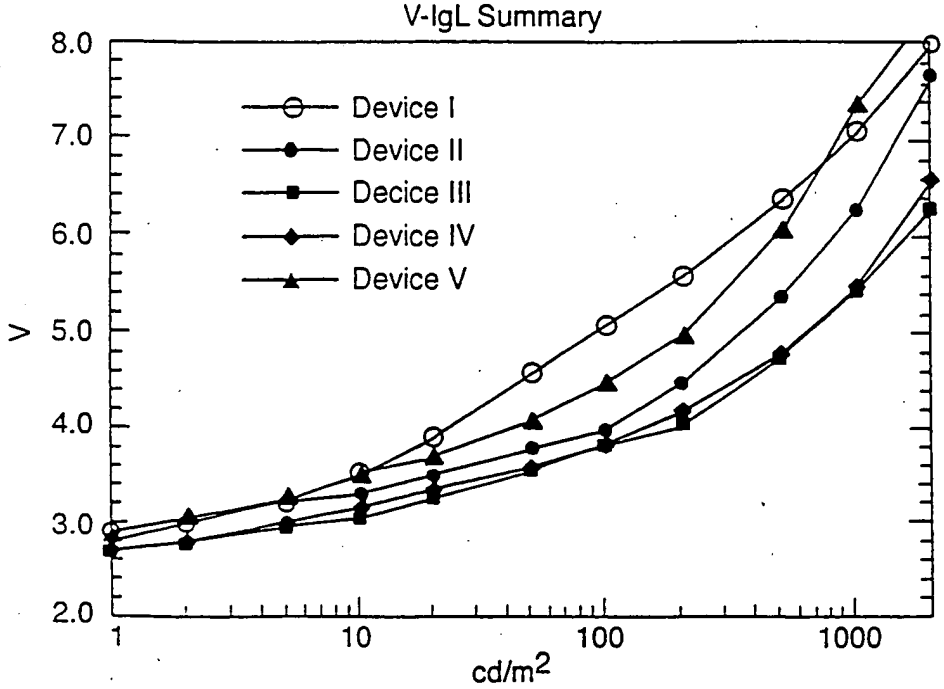

09/09/03 14:08 0580560

09/508054

PCT/GB98/02671

Fig.19.

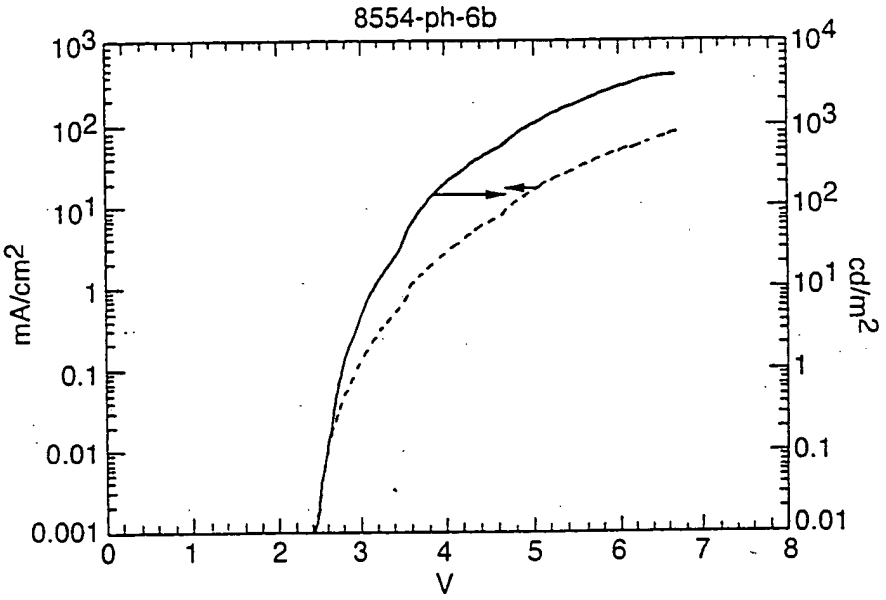

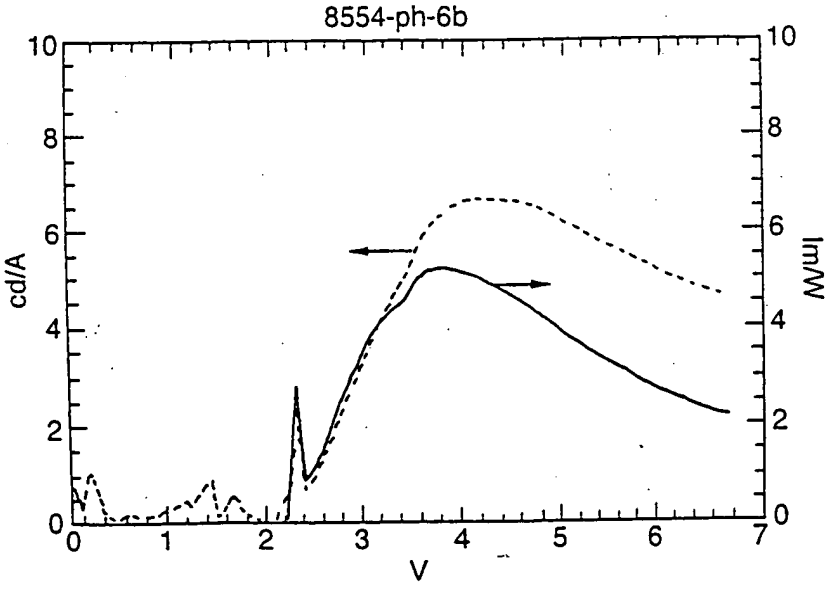

Fig. 20.

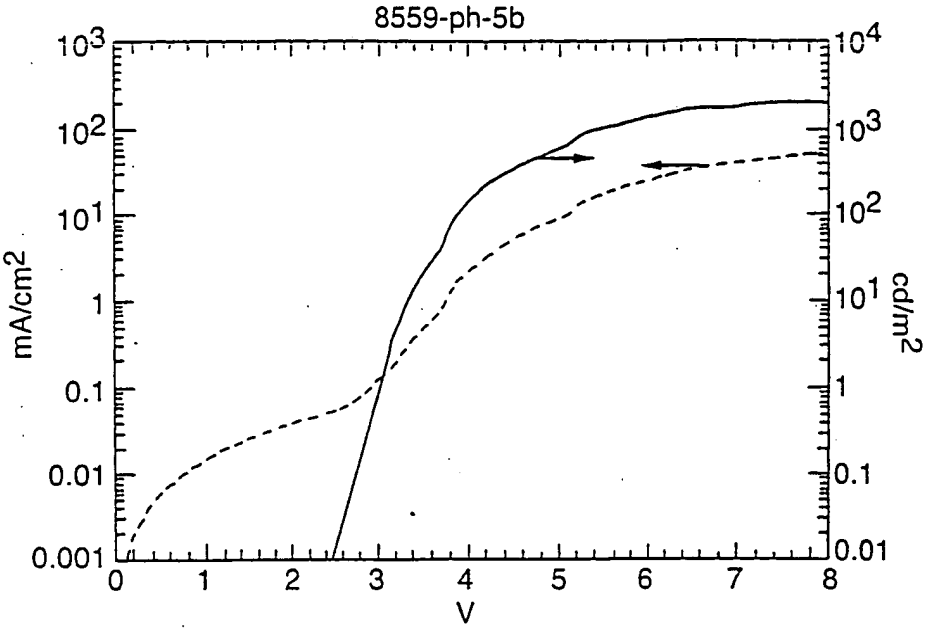

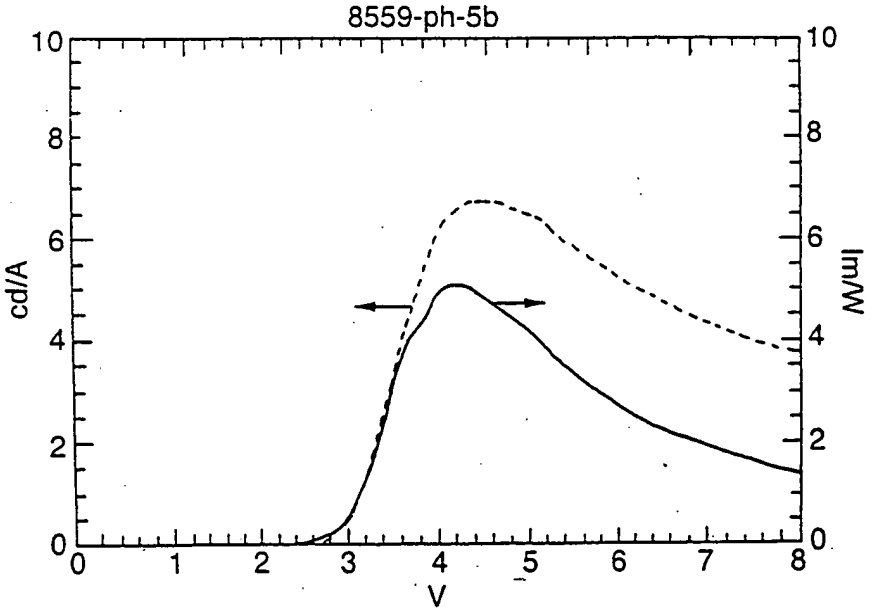

09508234-050600
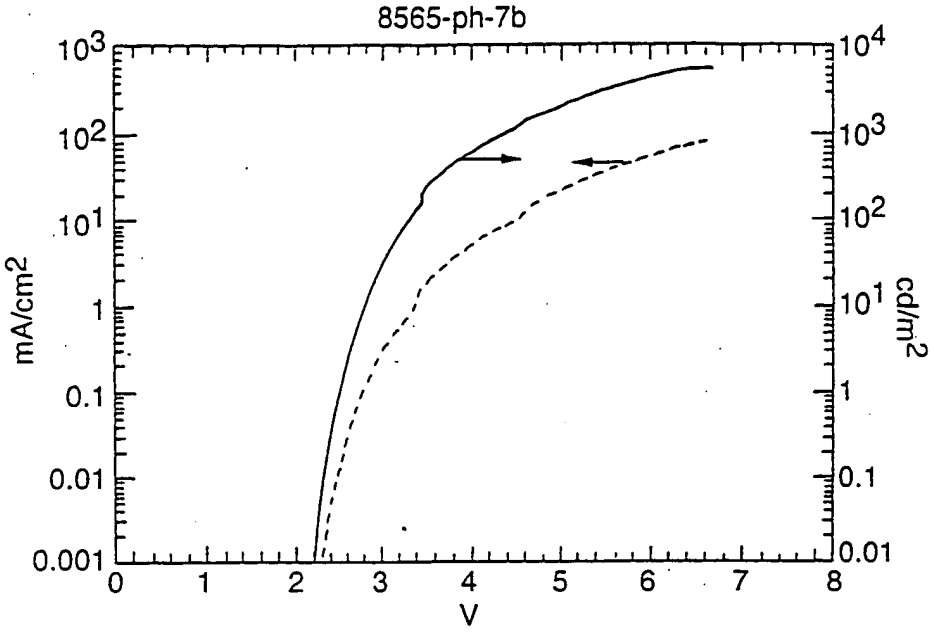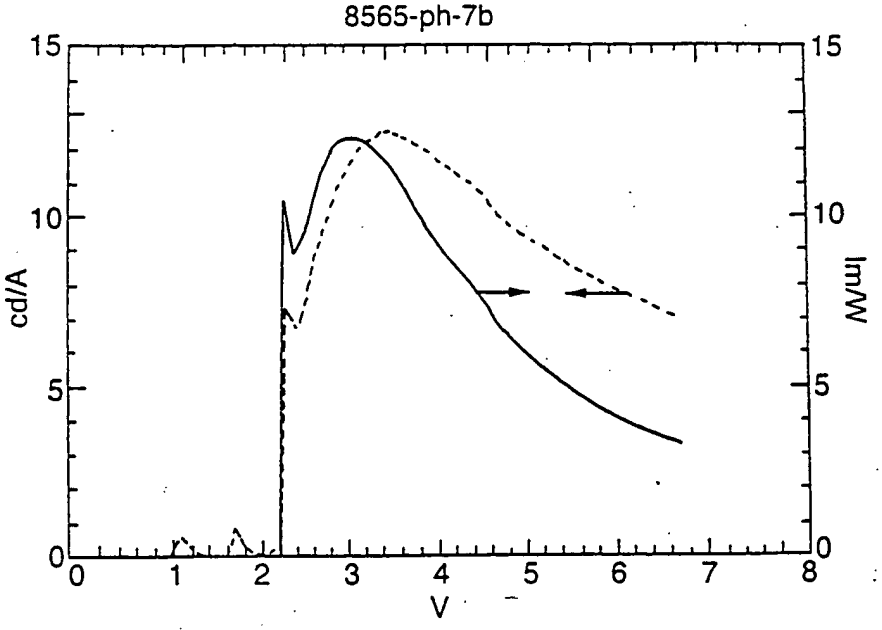
Fig. 21.